

42LK

Brass Metal Sealed Gate Valve



Via Circonvallazione, 10
13018 Valduggia (VC), Italy
Tel: +39 0163 47891
Fax: +39 0163 47895
www.vironline.com



Brass lockshield gate valve
Threaded F/F (ISO 228/1)
Non rising blow-out proof stem
Adjustable packing
Metal seal
Require dedicated tool to be operated

PN20

Free of CE marking (cat. according to Art. 4.3 Dir. 2014/68/EU)

Working conditions



- Suitable for: water, -10°C to +110°C
below 0°C only for water with added antifreeze fluids compatible with valve materials
over 100°C only for water with added anti-boiling fluids compatible with valve materials
- Not suitable for: gases group 1 & 2, liquids group 1 (Dir. 2014/68/EU)

PARTLIST

N.	Part	Material	Norm
1	Body	Brass	CW617N
2	Wedge	Brass	CW617N
3	Ring	Stainless steel	AISI 201
4	Stem	Brass	CW617N
5	Gasket	PTFE	-
6	Bonnet	Brass	CW617N
7	Stem gasket	PTFE	-
8	Spacer	Brass	CW617N
9	Packing nut	Brass	CW617N

DIMENSIONS

DN	G	L [mm]	C [mm]	ØP [mm]	H [mm]	ØD [mm]	□Q [mm]	K _v [m ³ /h]	Weight [g]
015	1/2"	43	12	15	64	15	6	12	193
020	3/4"	43	12	20	72	15	6	35	270
025	1"	47	13	24	80	15	6	60	338
032	1 1/4"	51	14	31	96	17	7	88	543
040	1 1/2"	54	15	37	107	17	7	175	718
050	2"	62	17	44	116	17	7	280	994

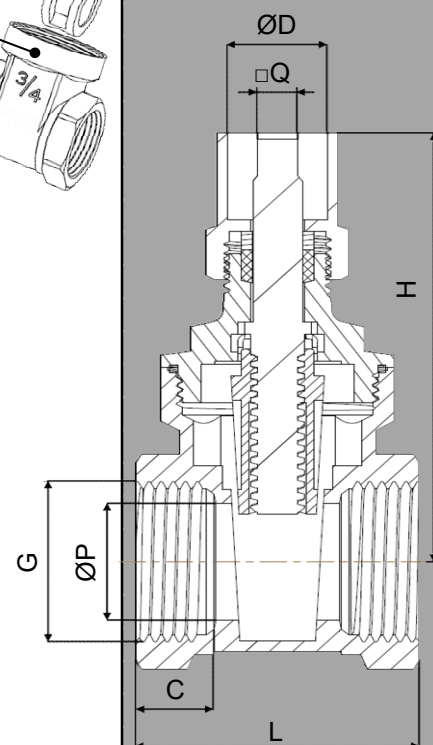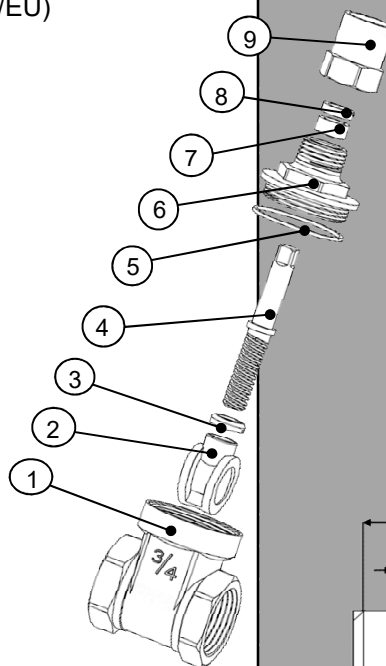

260903