

782DR

Double Check Valve




Via Circonvallazione, 10
13018 Valduggia (VC), Italy
Tel: +39 0163 47891
Fax: +39 0163 47895
www.vironline.com



DZR Brass double check valve
Threaded F/F (ISO228/1 GAS)
PN16 (Max working pressure 16bar up to 95°C)
To be installed horizontally or vertically
WRAS compliant
Free of CE marking (cat. according to Art. 4.3 Dir. 2014/68/EU)

Working conditions


- Suitable for: clear water only, 0°C to +95°C
- Not suitable for: gases group 1 & 2, liquids group 1 (Dir. 2014/68/EU)

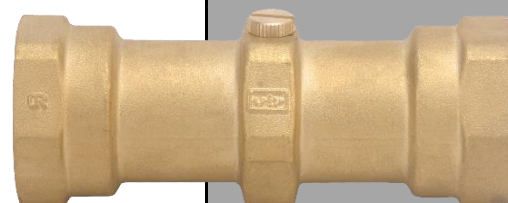


PARTLIST

N.	Part	Material	Norm
1	Body	DZR Brass CW602N	CuZn36Pb2As
2	Check Valves	-	-
3	Spacer*	Nylon	-
4	Relaising Ring	Stainless steel AISI 304	X5CrNi18-10
5	Plug	DZR Brass CW602N	CuZn36Pb2As
6	O-ring	EPDM	-

* For DN15

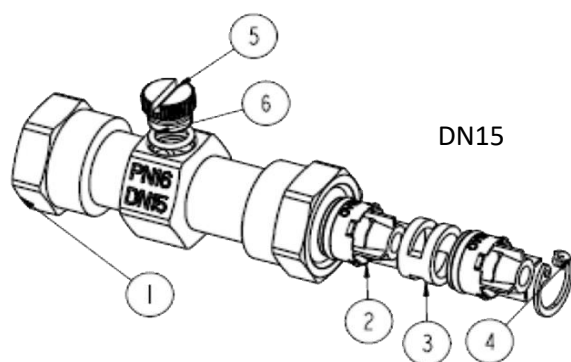


DN15

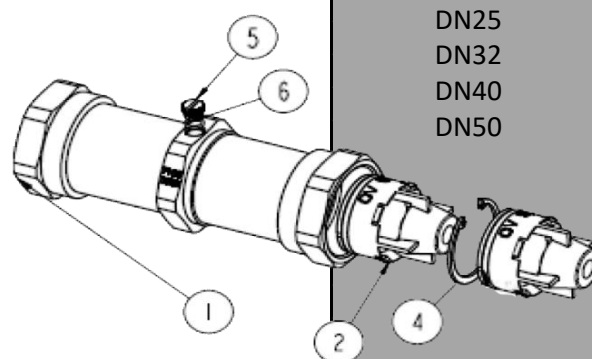

DN20
DN25
DN32
DN40
DN50

DIMENSIONS

DN	A	B	C	L	Weight
		[mm]	[mm]	[mm]	[g]
015	½"	15,0	16,8	75	137
020	¾"	18,0	19,5	87	207,5
025	1"	19,1	23,0	103	344
032	1¼"	21,4	27,5	123,8	578
040	1½"	21,4	30,5	140,8	742,5
050	2"	25,7	37	190,8	1376,5

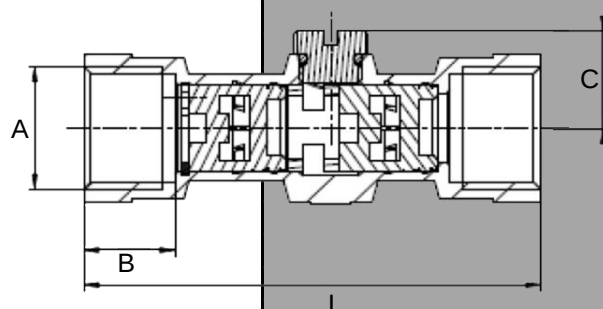

240925