

89DV

DZR Brass Strainer with Drain and Side Bosses



Via Circonvallazione, 10
13018 Valduggia (VC), Italy
Tel: +39 0163 47891
Fax: +39 0163 47895
www.vironline.com



DZR brass strainer with drain and side bosses
Threaded F/F (ISO 228/1)
Olive and nut (O/N) mounting kit on request
(for 22mm pipe according to European copper tubing, EN1057)
Stainless Steel strainer (20 mesh)
With threaded drain (3/8" ISO 7/1 Rp)
With 4 threaded and plugged side bosses (1/4" ISO 7/1 Rp)
Optional accessories available for drain and side bosses

PN25 (max 25bar up to 110°C, max 20bar above)
PN16 with O/N kit (max 16bar up to 30°C, max 5bar at 120°C)
Free of CE marking (cat. according to Art. 4.3 Dir. 2014/68/EU)


Working conditions

- Suitable for: water, -10°C to +130°C (120°C with O/N kit)
below 0°C only for water with added antifreeze fluids
over 100°C only for water with added anti-boiling fluids
- Not suitable for: gases group 1 & 2, liquids group 1 (Dir. 2014/68/EU)



PARTLIST


N.	Part	Material	Norm
1	Body	DZR brass	-
2	Drain cap	DZR brass	-
3	Cap gasket	Copper	-
4	Bonnet	DZR brass	-
5	Gasket	PTFE	-
6	Strainer	Stainless steel	SS304
7	Plug gasket	Copper	-
8	Plug	DZR brass	-

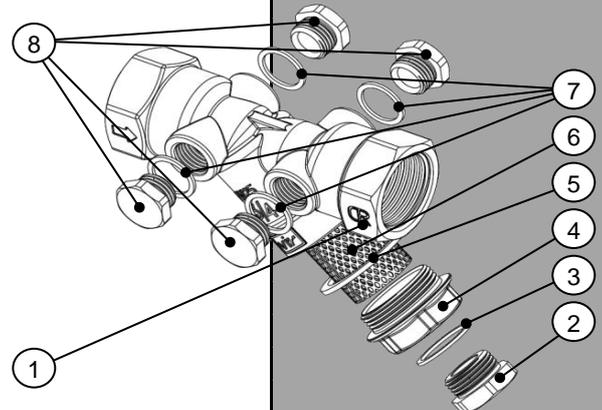

DIMENSIONS

DN	T	A	C	I	H ¹	Weight ¹
		[mm]	[mm]	[mm]	[mm]	[g]
020	3/4"	96	19	35	46 / 70 / 77	350 / 480 / 450

¹For standard version / version with drain Fig. 89DV-241 / version with drain Fig. 89DV-242

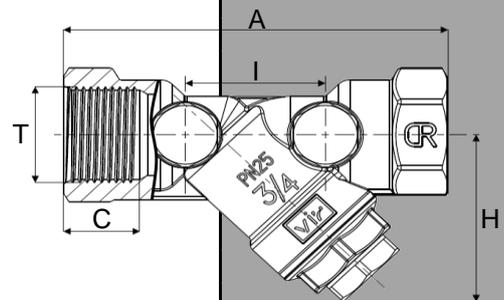

ACCESSORIES




Test point with drain
Fig. 9315



Test point
Fig.P84



Thermometer



Drain valve
Fig. 89DV-241