

# 9TMDR-A5

Thermostatic mixing valve



Via Circonvallazione, 10  
13018 Valduggia (VC), Italy  
Tel: +39 0163 47891  
Fax: +39 0163 47895  
www.vironline.com



Brass nickel-plated DZR thermostatic mixing valve  
Threaded M/M/M + connection union M ISO228 (M19X1.6)  
Thermostatic element 0929



PN10


Free of CE marking (cat. according to Art. 4.3 Dir. 2014/68/EU)

Working conditions

- Temperature range: 38° - 46° C (Default temperature setting 40° C)


## PARTLIST

N.	Part	Material	Norm
1	Body	DZR Brass	CW602N
2	O-ring	EPDM	-
3	PSU Piston	PSU	-
4	Connector	DZR Brass	CW602N
5	Check Valve	POM	-
6	Up brass cover	DZR LF Brass	CW511L
7	Spring	Stainless steel	S304
8	Adjust rod	DZR LF Brass	CW511L
9	Plastic handle	ABS	-
10	Retainer	Brass	HPb59-1
11	O-ring	EPDM	EPDM
12	Rubber gasket	EPDM	-
13	Filter	Stainless steel	S304
14	Collar	Stainless steel	S304
15	Collar	Stainless steel	S304
16	Therm. Element	-	-
17	Spring	Stainless steel	S304
18	Tub mixing PSU	PSU	-
19	Connector	Brass	HPb59-1

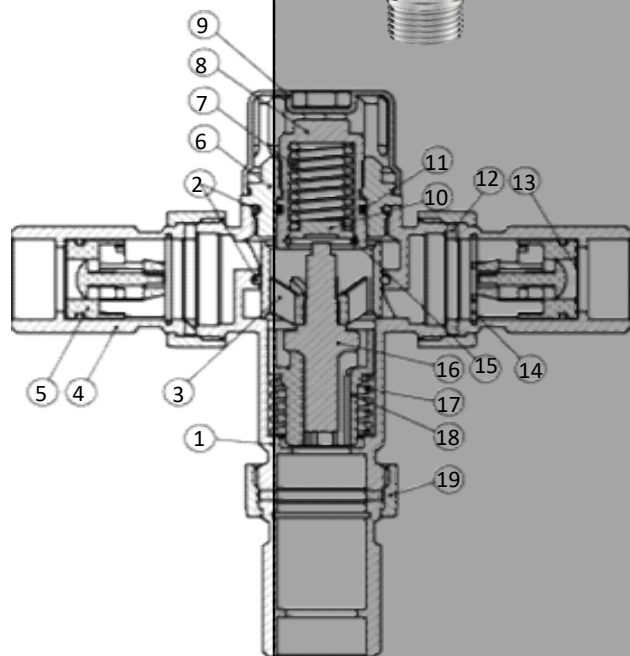

## DIMENSIONS

DN	ØF [mm]	H [mm]	L [mm]	ØB [mm]	Weight [kg]
15	15	131,5	120	39	0,54
20	20	139,5	136	39	0,63

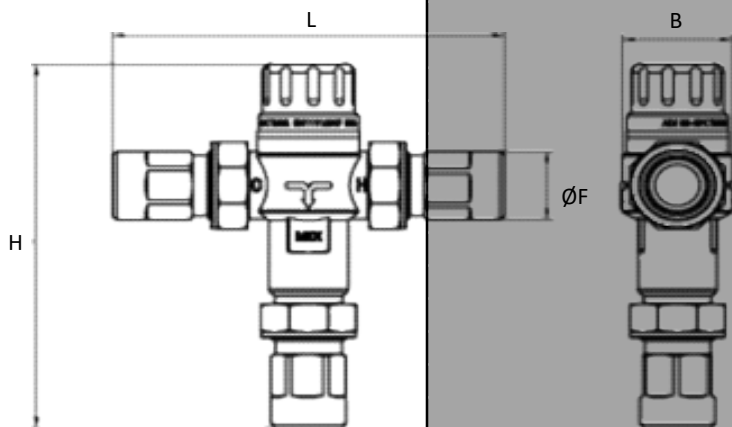

250730