

Accessory

Limit Switch for Butterfly Valve with Lever



Via Circonvallazione, 10
13018 Valduggia (VC), Italy
Tel: +39 0163 47891
Fax: +39 0163 47895
www.vironline.com



1NO/1NC limit switch

Technopolymer double insulated cover (CEI/EN 60335-1)

For 4020, 4320, 4520 and 4620 VIR butterfly valves series:

- With cast iron lever (mounting base according to ISO 5211 F07/F05)
- With aluminum lever (mounting base to be fixed on mechanical stop)

1 conduit entry PG13

Enclosure protection: IP67


CE compliant

Alternating current power supply (50Hz/60Hz)

Operation voltage	250V	400V	500V
Operation current	6A	4A	1A




Rated insulation voltage 500VAC

Working temperature: -25°C to +80°C

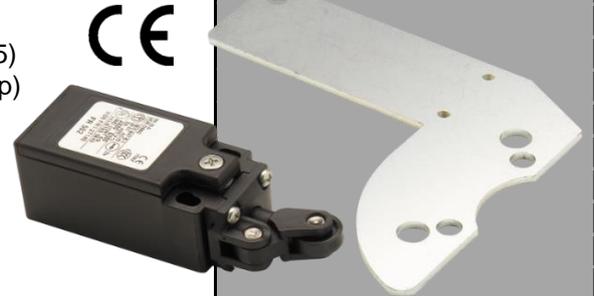


DIMENSIONS

Dimensions in mm, weight for version for cast iron lever 150g, weight for version for aluminum lever 100g

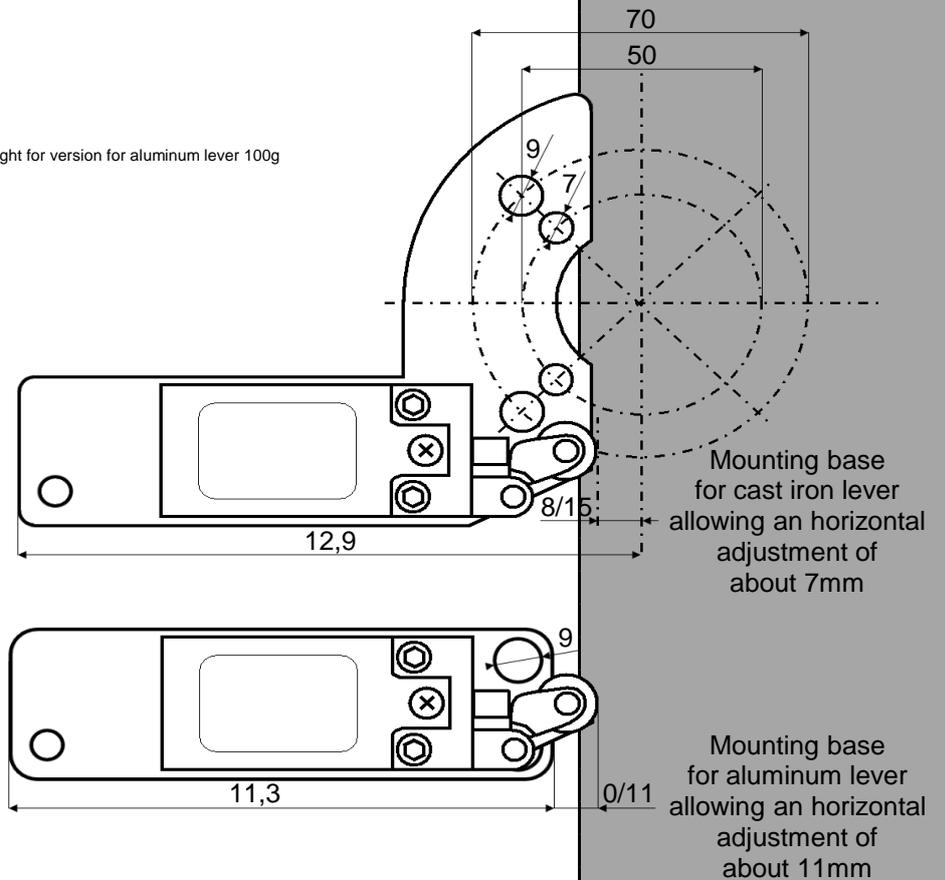

WIRING DIAGRAM

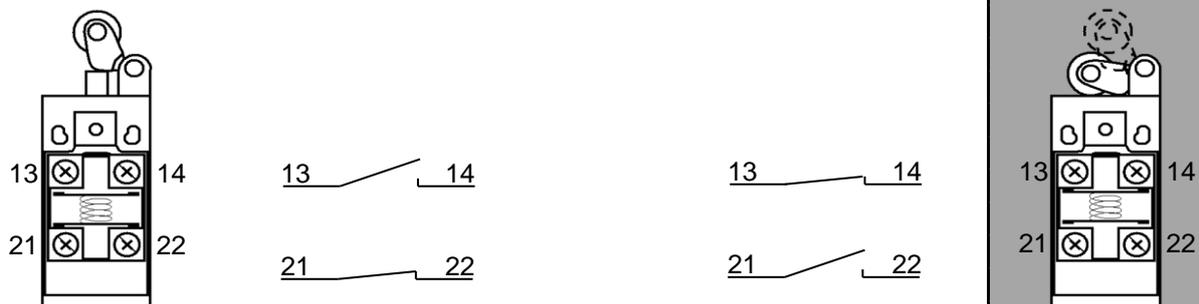

190610