

# 293LK

Brass Sillcock with Lockshield and Key



Via Circonvallazione, 10  
13018 Valduggia (VC), Italy  
Tel: +39 0163 47891  
Fax: +39 0163 47895  
www.vironline.com




Brass sillcock  
Threaded M (ISO 228/1) with hose union  
With lockshield and key  
Design according to BS1010-2

PN16  
Free of CE marking (cat. according to Art. 4.3 Dir. 2014/68/EU)


Working conditions

- Suitable for: water, 0°C to +100°C
- Not suitable for: gases group 1 & 2, liquids group 1 (Dir. 2014/68/EU)

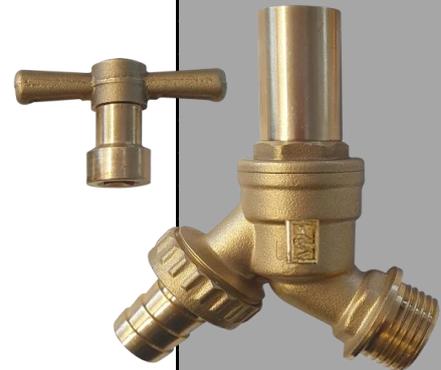


## PARTLIST

| N. | Part         | Material | Norm   |
|----|--------------|----------|--------|
| 1  | Body         | Brass    | CW617N |
| 2  | Hose union   | Brass    | CW617N |
| 3  | O-ring       | NBR      | -      |
| 4  | Ring         | Brass    | CW617N |
| 5  | Seal         | NBR      | -      |
| 6  | Disc         | Brass    | CW617N |
| 7  | Gasket       | PTFE     | -      |
| 8  | Bonnet       | Brass    | CW617N |
| 9  | Stem         | Brass    | CW617N |
| 10 | Packing rink | PTFE     | -      |
| 11 | Packing nut  | Brass    | CW617N |
| 12 | Lockshield   | Brass    | CW617N |
| 13 | Key          | Brass    | CW617N |

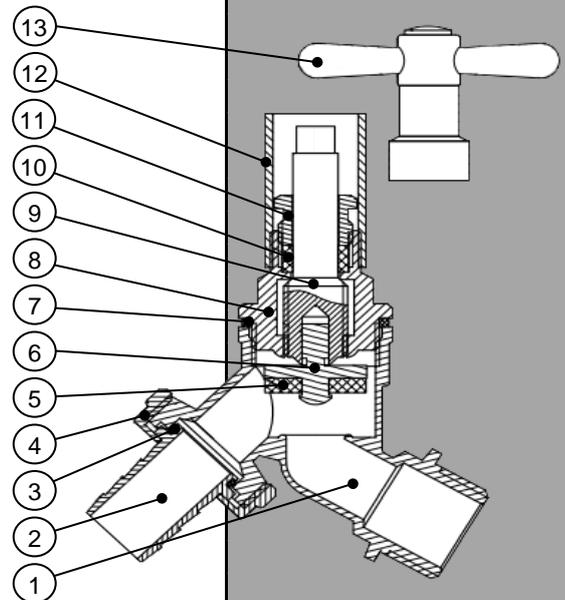

## DIMENSIONS

| DN  | T    | D    | E    | AA   | AB   | HA   | HB   | L    | Weight |
|-----|------|------|------|------|------|------|------|------|--------|
|     |      | [mm] | [g]    |
| 015 | 1/2" | 12   | 15,5 | 28   | 65   | 33   | 95   | 50   | 255    |

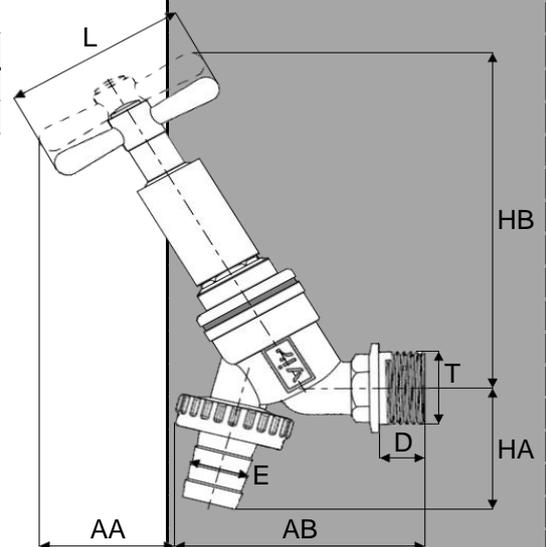

220831