

Accessory

Manual Gear With Limit Switches for Butterfly Valve



Via Circonvallazione, 10
13018 Valduggia (VC), Italy
Tel: +39 0163 47891
Fax: +39 0163 47895
www.vironline.com



Manual gear with limit switches for butterfly valve
Cast iron body, steel/ductile iron mechanisms
Valve side connection according ISO 5211, travel 90°
NO/NC limit switches both in open and close position
With 30cm electric wire
Enclosure protection IP55
CE compliant



Working temperature: -20° to +120°C



CE

DIMENSIONS

Model	Flange	Connect. [mm]	SA [mm]	SB [mm]	LA [mm]	LB [mm]	H [mm]	ØD [mm]	Weight [kg]
KXV4PEA00.2933	F05, F07	□9	152	53	90	120	37	150	5,5
KXV4PEB00.2933	F07	□11	152	53	90	120	37	150	5,5
KXV4PEC00.2933	F07	□14	152	53	90	120	37	150	5,5
KXV4PED00.2933	F07, F10	□17	211	74	74	205	36	285	8,0
KXV4PEE00.2933	F10	□22	211	74	74	205	36	285	8,0
KXV4PEF00.2933	F10, F12	□22	225	80	87	223	41	285	10,5

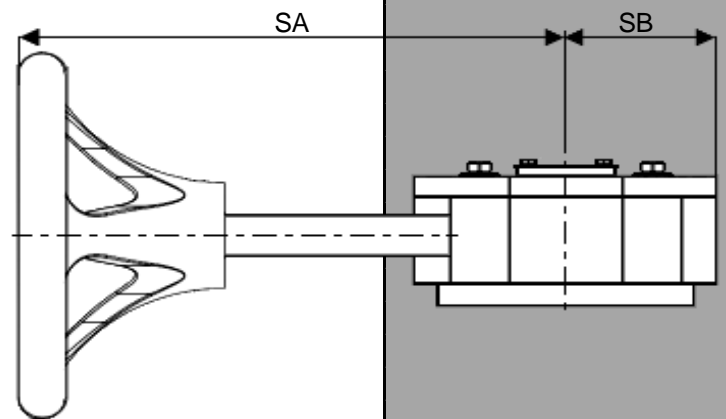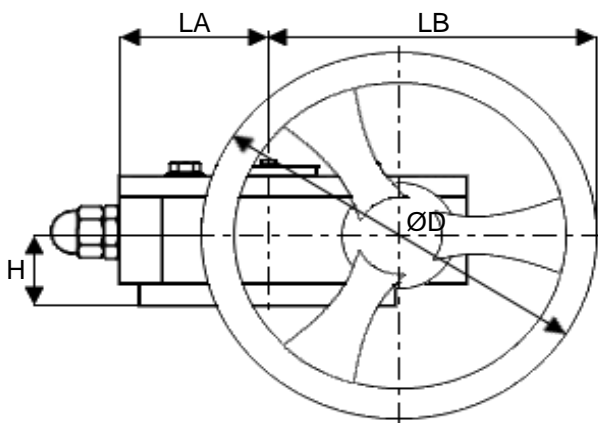

WIRING DIAGRAMS

